



POWER MODULE PRIME 1825 kW CONTINUOUS 1640 kW 50/60 Hz Switchable

Frequency (Hz)	Voltage (V)	Prime kW (kVA)	Continuous kW (kVA)
60	480/277	1825 (2281)	1640 (2050)
50	400/240	1600 (2000)	1400 (1750)

DEIF CONTROLLER

FEATURES

SINGLE SOURCE SUPPLIER

- Generator set manufactured in ISO 9001:2000 compliant facility
- Package factory designed and production tested
- Generator set and components meet or exceed the following specifications: AS1359, AS2789, BS4999, DIN6271, DIN6280, EGSA101P, JEM1359, IEC 34/1, ISO3046/1, ISO8528, NEMA MG1-22

WORLDWIDE PRODUCT SUPPORT

- Cat® dealers provide extensive post sale support including maintenance and repair agreements
- Supported 100% by your Cat dealer with warranty on parts and labor

RELIABLE, FUEL EFFICIENT DIESEL ENGINE

- The compact, four-stroke-cycle Cat 3516B turbocharged-aftercooled diesel engine combines durability while providing dependability and economy; fuel system operates on a variety of fuels

CAT GENERATOR

- Cat SR4B 826 frame generator designed to match the performance and output characteristics of the Cat diesel engine
- Double bearing, wye-connected, static regulated, brushless, permanent magnet excited

REDUCED ENVIRONMENTAL IMPACT

- 110% spill containment of onboard engine fluids
- Positive crankcase fumes ventilation

CAT COOLING SYSTEM

- Horizontally mounted radiator with vertical discharge
- Sized compatible to rating with energy efficient fan and variable frequency fan drive
- Provides 43C (110F) ambient capability
- Variable frequency drive fan controls improve partial load fuel consumption

ON-PACKAGE PARALLELING CONTROL SYSTEM

- Provides auto paralleling using package mounted controls
- EMCP 4.2 offers engine and generator monitoring and protection
- AGC-4 provides paralleling, load sharing, VFD control, and primary generator protection

DIGITAL VOLTAGE REGULATOR (Cat DVR)

- Three-phase sensing and adjustable volts-per-hertz regulation
- Provides precise control, excellent block loading, and constant voltage in the normal operating range

SOUND ATTENUATED CONTAINER

- Provides 9-high stack CSC rated enclosure for ease of transportation and protection
- Meets 77 dB(A) at 15 meters or below per SAE J1074 measurement procedure at prime rating

FACTORY INSTALLED STANDARD EQUIPMENT

SYSTEM	STANDARD EQUIPMENT
Engine	Cat 3516B heavy duty diesel engine Heavy duty, single element canister type air cleaner with service indicator Charging alternator, 60-Amp Fuel filters – primary and duplex secondary with integral water separator and change-over valve Spin on, full flow oil filters with water cooled oil cooler. Requires API CF-4 lube oil Oil drain lines routed to engine rail Jacket water heater, 9kW, 400/480V, 50/60 Hz, 3-phase w/isolation valves Fuel cooler and priming pump Electronic ADEM™ A3 controls Dual 24V electric starting motors
Generator	Double bearing SR-4B brushless, form wound, permanent magnet excited, three-phase with Cat digital voltage regulator (Cat DVR), space heater, 6-lead design, Class H insulation operating at Class F temperature for extended life, winding temperature detectors and anti-condensation space heaters (120/240V 1.2 kW). Generator equipped with System 4 insulation protection.
Containerized Module	40' ISO high cube container, 9-High stack CSC certified Four (4) sound attenuated air intake louvers and 3 lockable personnel doors with panic release Interior walls and ceilings insulated with 100 mm of acoustic paneling Floor of container insulated with acoustic glass and covered with galvanized steel Side bus bar access door, external access load connection bus bars Shore power connection via distribution block connections for jacket water heater, battery charger, space heaters, and generator condensate heaters Six (6) DC lights 1,250 gal fuel tank, UL listed, double wall, 10 hr runtime @ Continuous rating Solenoid fuel fill control valve External lockable connections for fuel Lube oil level regulator with makeup tank Sound attenuated 77 dB(A) @ 15 m (50 ft) Four (4) oversized maintenance-free batteries, battery rack and 20-Amp battery charger Critical grade exhaust silencer with dual 2 m (6.5 ft.) exhaust stacks for increased site power density Vibration isolators, stainless steel fastening hardware and hinges External drain access to standard fluids One 4.5 kg (10lb) carbon dioxide fire extinguisher Standard Cat rental decals and painted standard Cat power module white 110% spill containment system for on-board engine fluids
Cooling	Standard cooling provides 43C (110F) ambient capability at 100% Prime Horizontally mounted radiator with vertical air discharge Variable frequency fan drive (VFD) for optimal partial load fuel consumption
Generator Controls and Protection	Controls provide auto paralleling AGC-4 controller, voltage and frequency adjust, base load / PF / load sharing / synchronizer, auto start / stop control & generator CB control, SCADA Interface (Ethernet), fuel level indications & alarms, fuel tank fuel transfer control EMCP 4.2 genset mounted controller Automatic start/stop with cool down timer Generator Protection features: 25, 32, 40, 50/51, 27/59, 81 O/U Reverse compatibility for interface to legacy power modules 3000A UL rated generator circuit breaker with LSIG trip unit w/ammeter Multi-mode operation (island, multi-island and utility parallel), load sharing (multi-unit only) Manual and automatic paralleling capability Metering display: voltage, current, frequency, power factor, kW, WHM, kVAR, and synchroscope
Quality	Factory testing of standard generator set and complete power module UL, NEMA, ISO and IEEE standards O&M manuals

SPECIFICATIONS

GENERATOR

Frame Size	826
Pitch	0.6667
No. of poles	4
Excitation	Static regulated brushless PM excited
Constructions	Double bearing, close coupled
Insulation	Class H
Enclosure	Drip proof IP22
Alignment	Pilot shaft
Overspeed capability – % of rated	125% of rated
Voltage regulator	3 phase sensing with Volts-per-Hertz
Voltage regulation	Less than ± 0.5% voltage gain
Adjustable to compensate for engine speed droop and line loss	
Wave form deviation	Less than 5% deviation
Telephone Influence Factor (TIF)	Less than 50
Harmonic Distortion (THD)	Less than 5%

CAT 3516B DIESEL ENGINE



3516B, 4-Stroke diesel	
Bore – mm (in)	170 (6.7)
Stroke – mm (in)	190 (7.5)
Displacement – L (cu in)	69 (4,210)
Compression ratio	15:1
Aspiration	TA
Fuel system	EUI
Governor type	Cat ADEM A3 Control System

TECHNICAL DATA*

*Materials and specifications are subject to change without notice
 **Data represented is at standard conditions



Generator Set Technical Data	Units	50 Hz		60 Hz	
		Prime	Continuous	Prime	Continuous
Power Rating	kW	1600	1400	1825	1640
	(kVA)	(2000)	(1750)	(2281)	(2050)
Lubricating System	L	401.3			
Total oil pan capacity	(US gal)	(106.0)			
Fuel System					
Generator set fuel consumption**					
100% Load	L/hr	388.8	341.3	474.0	423.8
	(gal/hr)	(102.7)	(90.2)	(125.2)	(112.0)
75% Load	L/hr	293.4	259.1	358.0	325.1
	(gal/hr)	(77.5)	(68.4)	(94.6)	(85.9)
50% Load	L/hr	202.9	180.5	251.8	230.5
	(gal/hr)	(53.6)	(47.7)	(66.5)	(60.9)
Fuel Tank Capacity	L	4,731			
	(gal)	(1,250)			
Max Rated Running Time	hours	>11	>13	>9	>10
Cooling System					
Radiator Capacity	L (U.S. gal)	770 (203)			
Air Requirements					
Combustion air flow	m ³ /min	133.2	119.4	167.8	162.2
	(cfm)	(4,703.9)	(4,216.6)	(5,925.8)	(5,728.0)
Maximum air cleaner restriction	kPa	6.2			
	(in H ₂ O)	(24.9)			
Exhaust System					
Exhaust Flow	m ³ /min	326.4	290.9	418.2	386.1
	(cfm)	(11,526.7)	(10,273.0)	(14,768.6)	(13,635.0)
Package Noise Rating @ 15m (50 ft.)	dBA	77	77	77	77

TECHNICAL DATA (CONT.)

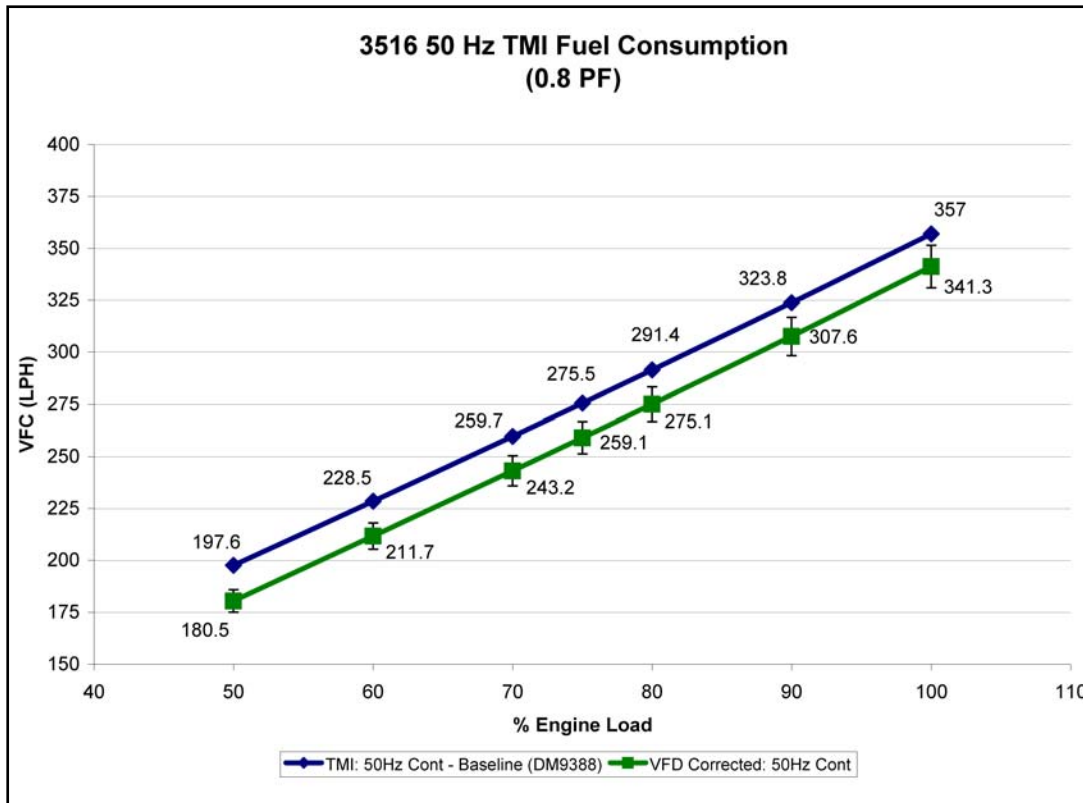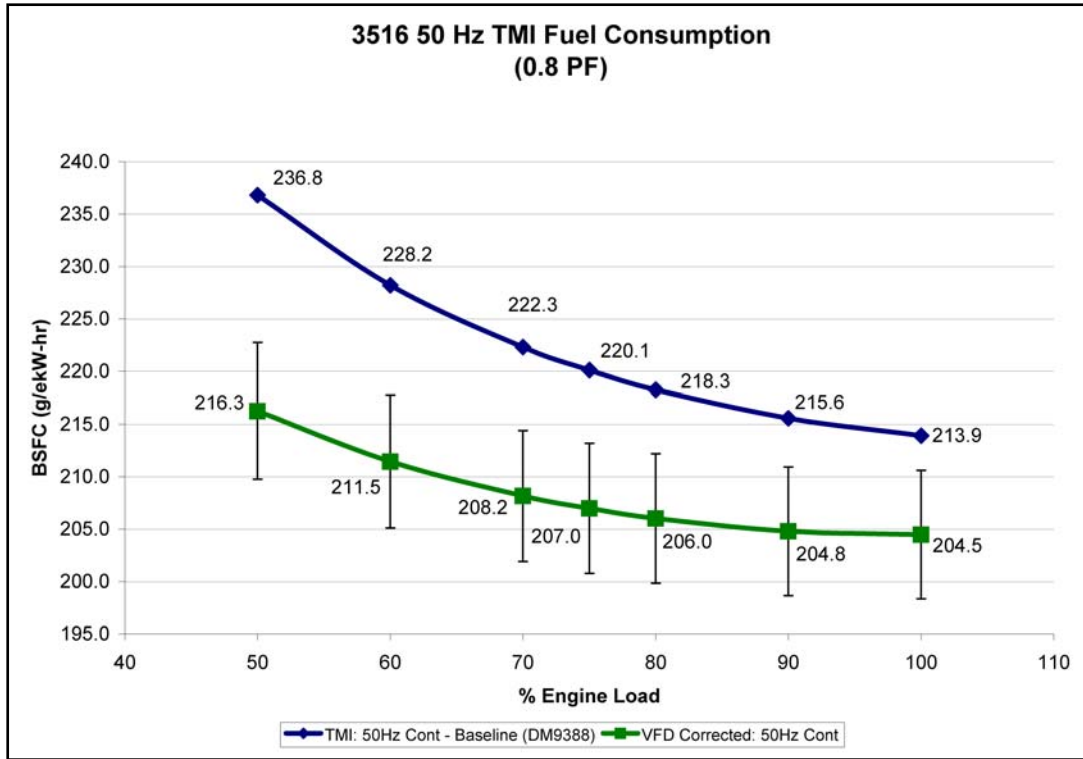

VFD Corrected data shows 3% error bars at each data point. All data normalized back to STP ambient temperature of 25 C (77 F).

TECHNICAL DATA (CONT.)

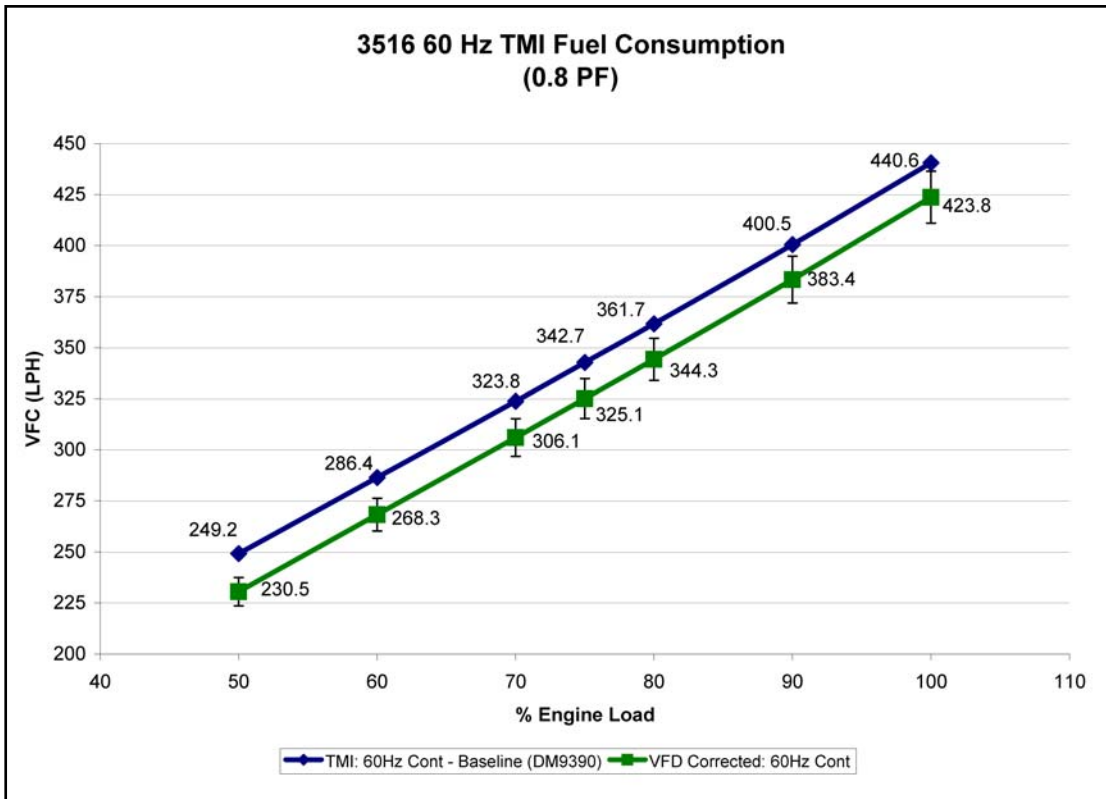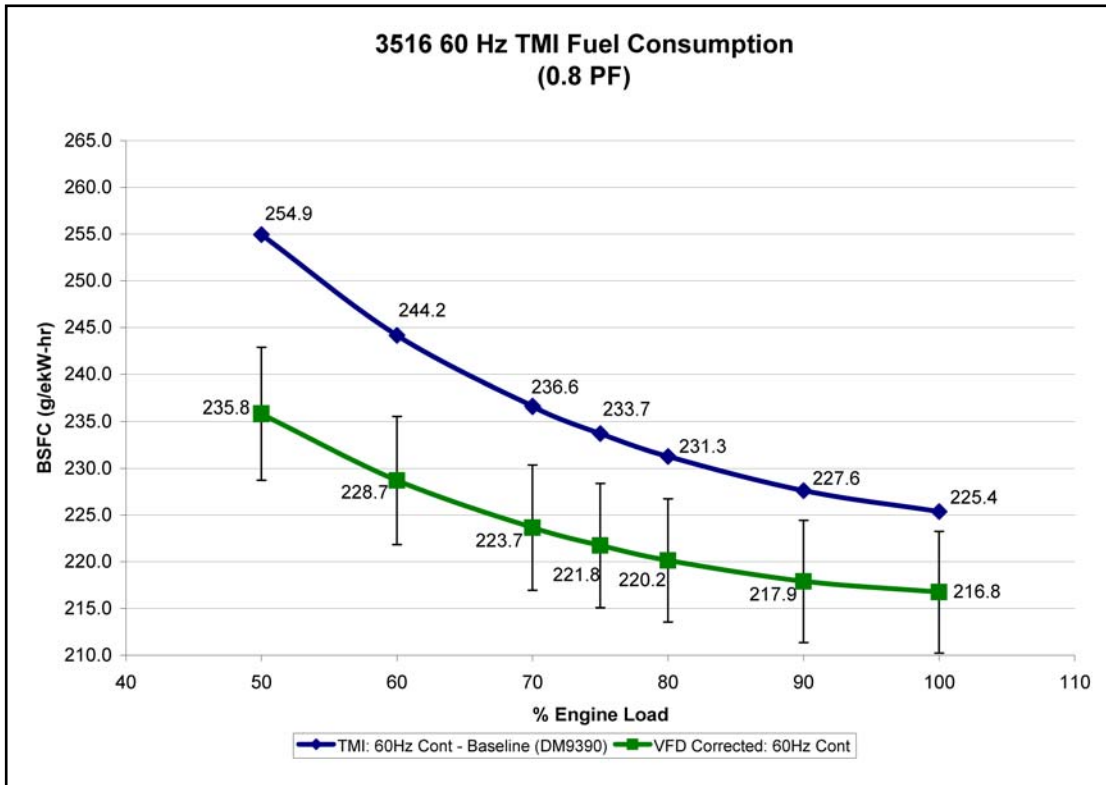

VFD Corrected data shows 3% error bars at each data point. All data normalized back to STP ambient temperature of 25 C (77 F).

STANDARD FEATURES

EMCP 4.2 LOCAL CONTROL PANEL

- Generator mounted EMCP 4.2 provides power metering, protective relaying and engine and generator control and monitoring.
- Convenient service access for Cat service tools (not included).
- Integration with the Cat DVR provides enhanced system monitoring.
- Ability to view and reset diagnostics of all controls networked on J1939 datalink eliminates need for separate service tools for troubleshooting.
- Real-time clock allows for date and time-stamping of diagnostics and events.
- True RMS AC metering, 3 phase: L-L volts, L-N volts, Phase, Amps, Hz, ekW, kVA, kVAR, kWhr, % kW, PF

EMCP 4.2 ENGINE OPERATOR INTERFACE

- Graphical display with positive image, transfective LCD, adjustable white backlight/contrast.
- Digital indication for
 - RPM
 - DC Volts
 - Operating hours
 - Oil pressure
 - Coolant Temperature
 - Oil Temperature
- Two LED status indicators (1 red, 1 amber)
- Engine cool-down timer
- Engine cycle crank
- Three engine control keys and status indicators (Run/Auto/Stop).
- Lamp test and Alarm acknowledgement keys
- Warnings/shutdowns with indicating text for:
 - Low oil pressure
 - Overspeed
 - High Oil Temperature
 - Overcrank
 - Emergency stop
 - AGC-4
- Emergency stop pushbutton
- Display navigation keys including two shortcut keys for Engine Parameters or Generator Parameters

AGC-4/EMCP 4.2 PROTECTIVE RELAYING

- Generator protective features
 - 25 sync-check (AGC-4)
 - 32 rev. power (EMCP 4.2 and AGC-4)
 - 40 loss of excitation (Cat DVR and AGC-4 impedance based)
 - 50/51 Inst. and time overcurrent (GCB trip unit and AGC-4)
 - 47 Negative Voltage Sequence (AGC-4)
 - 46 Negative Sequence Current (AGC-4)
 - 27/59 phase under/over voltage (EMCP 4.2 and AGC-4)
 - 81O/U under/over frequency (EMCP 4.2 and AGC-4)
- Package mounted AGC-4 controls provides auto paralleling, CAN-bus, Ethernet communications, PWM and Analog outputs, and legacy analog load sharing (real and reactive)
- AGC-4 main display/ AOP secondary display

VOLTAGE REGULATION AND POWER FACTOR CONTROL CIRCUITRY

- Generator mounted automatic voltage regulator, microprocessor based.
- Manual raise/lower voltage adjust capability and VAR/power factor control circuitry, all via AGC-4, for maintaining constant generator power factor while paralleled with utility
- Includes RFI suppression, exciter limiter and exciter diode monitoring.

CURRENT TRANSFORMERS

- CT's rated 3000:5 with secondaries wired to shorting terminal strips.

POTENTIAL TRANSFORMERS

- 4:1 ratio with primary and secondary fuse protection.

CONTAINER

- 40' ISO high cube container, CSC 9-High Stack Certified
- Painted standard Cat Power Module White per Caterpillar Specifications
- Standard air intake louvers
- Three (3) lockable personnel doors with panic release
- Fire extinguisher
- 110% spill containment system for on-board engine fluids

INTERNAL LIGHTING

- Six (6) internal DC lights with timers located at each personnel door
- One (1) duplex service receptacle

BATTERY CHARGER AND BATTERIES

- 24 VDC/20A battery charger with float/equalize modes and charging ammeter
- Four oversized maintenance free batteries

EMERGENCY STOP PUSHBUTTON

- Single emergency stop pushbuttons (ESP) located on rear face of generator set controls area

EXHAUST SILENCER

- Critical grade, internally mounted, dual cylindrical exhaust silencers
- 2 m high vertical discharging exhaust stack located in radiator discharge area

FUEL TANK

- UL Listed 1250 gallon double walled tank
- Fuel solenoid valve system
- Triple fuel/water separators

CIRCUIT BREAKER

- 3000A fixed type, 3 poles, genset mounted, electrically operated, insulated UL489 CB.
- Solid state trip unit for overload (time overcurrent) and fault (instantaneous) overcurrent protection. LSIG is standard.
- Includes DC shunt trip coil activated on any monitored engine or electrical fault, 100 KA-interrupting capacity at 480 VAC.
- Ground fault sensing/trip (needs optional ground CT)

BUS BARS

- Three phase, plus full rated neutral, bus bars are tin-plated copper with NEMA standard hole pattern for connection of customer load cables and generator cables.
- Bus bars are sized for full load capacity of the generator set at 0.8 power factor.
- Includes ground bus, tin-plated copper, for connection to the generator frame ground and field ground cable.

AC DISTRIBUTION

- 50/60 Hz Transformer distributes utility voltage or customer supplied line voltage, which is selectable via onboard switch, for the Power Module AC auxiliaries .
- Provides 240/120 VAC for all module accessories except Jacket water heater (400V). Includes controls to de-energize jacket water heaters and generator space heater when the engine is running

LUBE OIL MAKE-UP SYSTEM

- Includes oil pan-mounted oil level regulator and 114 L (30 gal) oil tank for maintaining oil pan levels in extended run applications. Oil tank can be remotely filled without shutting down the engine.

TRAILER (optional)

- Three axle with Anti-lock brake system
- Goodyear G314 295/75R225 Load Range G

MODES OF OPERATION

- Provides for single unit stand-alone operation, island mode paralleling and load sharing with other power modules, and single unit-to-utility mode paralleling for base load control (with open transition between paralleling modes)*
- Island mode paralleling features:
 - AGC-4 control allows single unit to connect to a dead bus
 - Auto synchronization (voltage & phase matching)
 - Load sharing (kW) analog signal (like units & legacy compatible)
 - Load sharing (kVAR) analog signal (like units only)
- Utility mode paralleling features:
 - Auto synchronization (voltage & phase matching)
 - Base-load control (selectable: programmable set-point or potentiometer adjust)
 - Soft load/unload (programmable, shared set-point)
 - Power Factor control (programmable set-point)

RATING DEFINITIONS

Prime – Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand of 100% of prime rated ekW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year. Prime power in accordance with ISO8258. Fuel stop power in accordance with ISO3046.

Continuous – Output available without varying load for an unlimited time. Average power output is 70 – 100% of the continuous power Rating. Typical peak demand is 100% of continuous rated ekW for 100% of the operating hours. Continuous power is in accordance with ISO8528. Fuel stop power is in accordance with ISO3036.


WEIGHTS AND DIMENSIONS

Model	Length in (mm)	Width in (mm)	Height in (mm)	Weight with Lube oil and Coolant lb (kg)	Weight with fuel, lube oil and coolant (kg)
XQ2000 w/o chassis	480 (12,192)	97.5 (2,438)	114 (2,896)	64,000 (29,021)	73,000 (33,106)
XQ2000 w/ chassis	480 (12,192)	97.5 (2,438)	168 (4,267)	74,000 (33,638)	83,000 (37,641)
Center of gravity	x = +4,913 +/- 300 mm (from rear of container); y = +788 mm +/- 300 mm (from container floor); z = 0 +/- 150 mm (centerline)				

XQ2000 IPP



EQUIPMENT LAYOUT

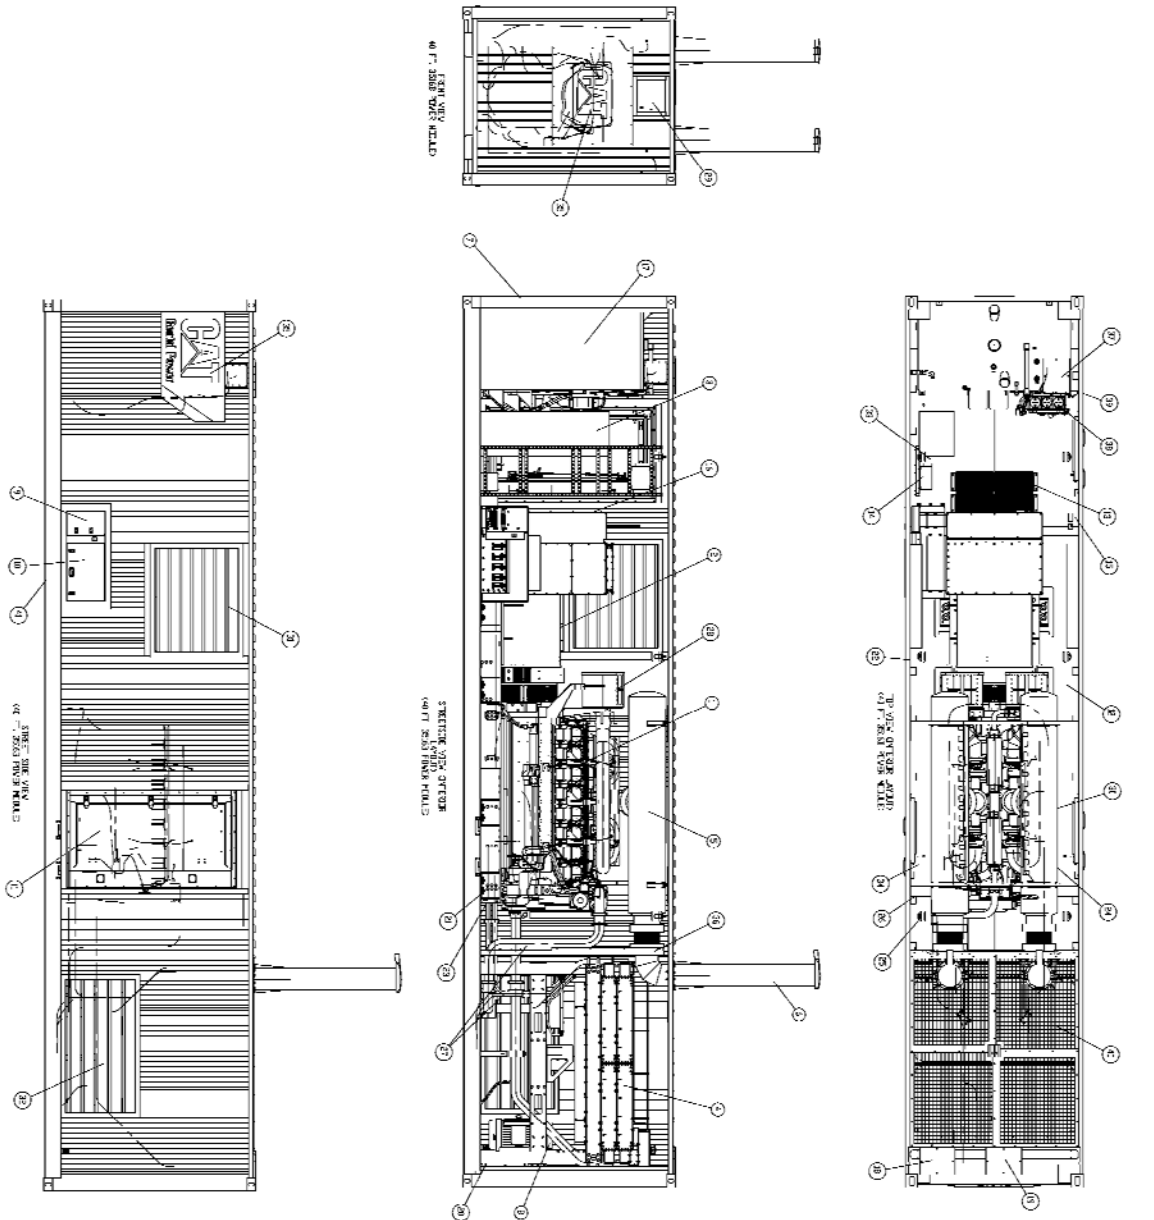

LEGEND	
SYMBOLS	
1	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
2	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
3	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
4	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
5	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
6	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
7	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
8	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
9	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
10	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
11	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
12	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
13	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
14	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
15	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
16	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
17	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
18	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
19	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
20	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
21	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
22	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
23	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
24	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
25	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
26	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
27	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
28	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
29	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
30	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
31	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
32	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
33	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
34	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
35	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
36	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
37	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
38	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
39	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
40	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK
41	3000 OHMS 250W 60 VZ 1/2WGT STEEL WALK

Information contained in this publication may be considered confidential. Discretion is recommended when distributing.
CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate
and product identify used herein, are trademarks of Caterpillar and may not be used without permission

www.Cat-ElectricPower.com

©2012 Caterpillar.
All rights reserved.